

# INSTRUCTION MANUAL


## PORTABLE MAGNETIC DRILLING MACHINE

Read this manual carefully before operating your Nitto Kohki Portable Magnetic Drilling Machine. Keep this manual with your machine. All users of the Nitto Kohki Portable Magnetic Drilling Machine must read this manual.

### ATRA ACE Model AO-5575A

Professional Tool

For One-Touch Type Annular Cutter Only  
(Side-Lock Type Annular Cutter cannot be used.)

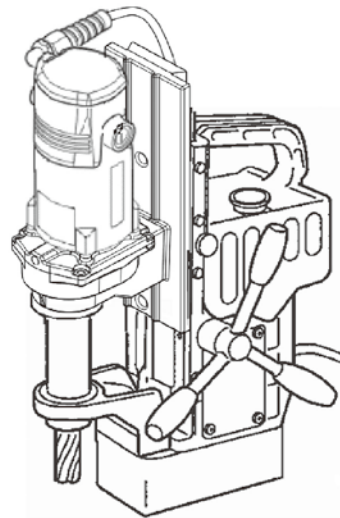

### Specifications

| Model                       |                          | AO-5575A  |
|-----------------------------|--------------------------|---|
| Power Supply (Single Phase) |                          | 220-240 V AC 50/60 Hz                                       |
| Drill Motor                 | Rated Power Consumption  | 950 W   |
|                             | Rated Current            | 4.3 A   |
|                             | No-load Speed            | 520 min <sup>-1</sup>                                       |
|                             | Load Speed               | 300 min <sup>-1</sup>                                       |
| Magnet Power Consumption    |                          | 50 W  |
| Hole Capacity               | JETBROACH One-touch type | Max. Hole Diameter 55 mm dia.<br>Max. Plate Thickness 75 mm |
|                             | HI-BROACH One-touch type | Max. Hole Diameter 50 mm dia.<br>Max. Plate Thickness 50 mm |
|                             | AUSTBROACH               |   |
| Magnet Holding Power        |                          | 10 kN   |
| Magnet Size                 |                          | 86 x 170 mm   |
| Weight                      |                          | 17.5 kg   |

The specifications and configurations contained in this document are subject to change without prior notice due to improvements we are making day in, day out.



Manufactured by :

**NITTO KOHKI Co., Ltd.**

9-4, NAKAIKEGAMI  
2-CHOME, OHTA-KU,  
TOKYO, 146-8555, JAPAN  
Tel : +81-3-3755-1111  
Fax : +81-3-3753-8791

**Keep the manual handy – so you can use it whenever necessary.**

Original Instructions

TQ15123-0 04/2017







Thank you very much for your purchase of **Nitto Kohki product**. Before using your machine, please read this manual carefully so that you may use it properly to get the most out of it.

**Please keep the manual handy - so you can use it whenever necessary.**

- English :Please ask your dealer or distributor for instruction manual in local language(s).
- German :Bitte fragen Sie Ihren Händler nach eine Betriebsanleitung in Landessprache.
- French :S'il vous plait, veuillez demandez á votre fournisseur de manuel instruction en langue locale.
- Spanish :Por favor, contacte con su distribuidor para el manual de instrucciones en español.
- Portuguese :Por favor pessa ao seo agente ou distribuidor o manual de instrucoes ih linguagen local.
- Italian :Per Manuale Istruzioni in lingua locale Vi preghiamo di rivolgerci al rivenditore o distributore.
- Dutch :Vraag uw handelaar om een nederladstalige gebruiksaanwijzing.
- Swedish :Be er lokala Åtreförsäljare eller distributör om manualer på svenska.
- Danish :Venligst henvend Dem til den danske distributør for instructions manualer.
- Polish :Proszę pytać swojego dealera lub dystrybutora o instrukcje obsługi w języku localnym.
- 中文 :請向當地供應商或經銷商詢問中文使用說明書




| <b>CONTENTS</b>   | <b>page</b> |
|---|-------------|
| GENERAL SAFETY RULES .....                                | 2           |
| POWER TOOL SAFETY .....                                   | 3           |
| ABOUT YOUR NITTO PORTABLE MAGNETIC DRILLING MACHINE ..... | 4           |
| 1. APPLICATION .....                                      | 7           |
| 2. RECEIVING INSPECTION .....                             | 7           |
| 3. PART NAMES .....                                       | 8           |
| 4. FUNCTIONS OF ELECTRONIC CONTROL .....                  | 9           |
| 5. MACHINE SETUP .....                                    | 9           |
| 6. MACHINE OPERATION .....                                | 12          |
| 7. TROUBLESHOOTING .....                                  | 15          |
| 8. MAINTENANCE/SERVICE .....                              | 16          |
| 9. OPTIONAL PARTS .....                                   | 17          |
| 10. ORDERING PARTS .....                                  | 19          |

## PICTOGRAM

-  Warning: It might be dangerous to operate the power tool if the instructions supplied are not followed.
-  Do not allow the main body or the power source to get wet as it will cause electric shock and leakage.
-  Using this tool improperly could result in serious injury. Read the instruction manual before using.
-  Always wear suitable eye protection.
-  Always wear suitable hearing protection.
-  Always wear respiratory protective equipment (PPE).

- Sound Pressure Level :Maximum 85dB(A) according to Clause 1.7.4(f), Annex I, Machinery Directive.
- Sound Power Level :Maximum 91dB(A)
- Operating Temperature :5°C ~ 40°C
- Operating Humidity :Maximum 90% at 25°C
- Over-voltage Category :Category II according to IEC664-1
- Pollution Degree :Degree 3 according to IEC664-1
- Wiring Diagram No. :TZW0158

The following Safety notations are used throughout the manual to highlight safety precautions for the user and for the machine.

|   |   |
|---|---|
|  <b>DANGER:</b>  | Indicates an imminently hazardous situation which, if not avoided by following the instructions given, will result in death or serious injury.    |
|  <b>WARNING:</b> | Indicates a potentially hazardous situation which, if not avoided by following the instructions given, could result in death or serious injury.   |
|  <b>CAUTION:</b> | Indicates a potentially hazardous situation which, if not avoided by following the instructions given, could result in injury or material damage. |

**Caution:** Important precautions for machine or tool setup, operation and maintenance.

## **WARNING**

Some dust created by power sanding, sawing, grinding, drilling, and other construction activities contains chemicals known [to the State of California] to cause cancer birth defects or other reproductive harm.

Some examples of these chemicals are:

- Lead from lead-based paints,
- Crystalline silica from bricks and cement and other masonry products, and
- Arsenic and chromium from chemically-treated lumber.

Your risk from these exposures varies, depending on how often you do this type of work. To reduce your exposure to these chemicals: work in a well ventilated area, and work with approved safety equipment, such as those dust masks that are specially designed to filter out microscopic particles.

## **GENERAL SAFETY RULES**

### **WARNING**

#### **TO OPERATORS**

##### **Always Wear Proper Clothing**

- Do not wear loose clothing. Loose clothing can become caught in the drilling machine. This could cause severe injuries. Be careful that loose clothing does not come into contact with the machine.
- Wear non-skid footwear. If you lose your footing, you could contact moving portions of the machine. This could cause severe injuries. Always wear non-skid footwear and remain balanced when using the drilling machine.
- Be careful of long hair. Wear a hat or a hair net to contain long hair. Long hair can become caught in the drilling machine. This will cause severe injuries. Be careful that long hair does not come into contact with the drilling machine.

##### **Always Wear Suitable Eye Protection**

- Always wear suitable eye protection. The operation of your drilling machine will cause flying chips and particles. These will cause severe eye injuries. You must always wear suitable eye protection.
- Not all glasses are suitable eye protection. Wear only suitable eye protection that comply with ANSI standards. Not all of the lenses are shock resistant. Ordinary glasses will not provide sufficient eye protection.

##### **Always Wear Suitable Hearing Protection**

- Always wear suitable hearing protection. The operation of your drilling machine will cause big sound

occurs. These will cause severe hearing loss injuries.

You must always wear suitable hearing protection

##### **Always Wear respiratory protective equipment (PPE)**

- Always Wear respiratory protective equipment (PPE) when working in an environment where dust particles are generated in operation.

##### **Maintain Good Posture**

- Always wear non-skid footwear and maintain good posture. Do not use the drilling machine when you are tired. Fatigue or loss of balance could cause you to lose control of the machine. This could cause severe injuries. Always stay balanced. Always keep good posture. Stop using the machine if you are tired.

##### **Never Touch the Cutting Tip**

- Never touch the moving or cutting tip. Contact with the moving tip will cause severe injuries. Always keep all parts of your body away from the cutting tip. Always keep your hand and clothing away from the cutting tip.

## **ABOUT THE WORK AREA**

### **Keep Work Area Clean**

- Always keep your work area clean. Cluttered work areas cause accidents. Always keep clear of other objects.
- Never use the magnetic drilling machine when it is wet. Always use the drilling machine in a dry area. Do not use the drilling machine in the rain. If you use the machine when it is wet you can get electric shock. If you use the machine in the rain you can get an electric shock.
- Always use the drilling machine in a well-lighted area. Do not use the drilling machine in the dark.
- Avoid all flammable materials. Use of the drilling machine may cause a spark that could ignite a fire or an explosion. Never use the machine near any flammable material.
- Keep away from children. Always keep the drilling machine away from children. Do not operate drilling machine when children are present.

## **BEFORE OPERATION**

### **Make sure that all parts are free from damage**

- Make sure that the drilling machine is in good operating condition. Operation of a damaged machine could result in severe injuries. If there is any damage to the machine, do not use the machine. If there is any damage to the machine, take it to an authorized Nitto dealer for repair.
- Do not attempt service or repair of the drilling machine. All service or repair should be done by an

authorized Nitto dealer.

### **Secure Your Work**

- Always secure your work piece. Improperly mounted work can become loose. This can cause severe injuries. Always secure all work.
- Always use a vice or a clamp. Do not attempt to hold any work piece with your hand. Attempting to hold a work piece with your hand may cause severe injuries. Always use a vice or clamp to hold the work piece.
- Always secure your drilling machine. Improperly mounted drilling machine can come loose. This can cause severe injuries. Always secure the drilling machine.

### **Avoid Clutter**

- Always stay clear of other objects. Cluttered work areas cause accidents. Always keep a clean work area and stay away from other objects.

### **Always Remove Spanner Wrenches and Adjustment Tools**

- Always remove spanner wrenches and adjustment tools after adjustments have been made to the drilling machine. Always remove all adjustment tools before using the drilling machine.

### **Always Use a Cutter that is Appropriate for Your Work**

- Always use a Cutter that is appropriate for your work. Avoid heavy-duty work that is beyond the capacity of your drilling machine. If the work exceeds the capacity of your drilling machine, this can cause accidents and severe injuries. Always use the drilling machine in accordance with its performance specifications.

## **SAFE HANDLING**

- Never leave the magnetic drilling machine unattended while it is running. When the machine is unattended, disconnect the power source. Do not leave the work area until the machine comes to a complete stop. Operating the machine while it is unattended can cause accidents that may result in severe injuries.

### **HOW TO STORE YOUR MAGNETIC DRILLING MACHINE**

- Always store the machine in a dry area.
- Always keep the machine out of the reach of children.

### **HOW TO CARRY YOUR MAGNETIC DRILLING MACHINE**

- Disconnect the power and turn off the machine whenever you carry the machine.

## **MAINTENANCE**

### **Do not take apart or modify your magnetic drilling machine.**

- Do not attempt to disassemble or modify your magnetic drilling machine.
- Do not modify your magnetic drilling machine. Modifications can cause accident and severe injuries.
- All service and repairs must be performed by an authorized Nitto dealer. Any attempt to service or repair the machine yourself may result in an accident and severe injuries.

### **Check all Parts for Damage.**

- Always inspect the magnetic drilling machine before use.
- Always check that the pilot pin and cutter are in good condition. Use of the machine with worn pilot pins or worn cutter can cause accidents and severe injuries.
- Inspect all cutter before you put them on the magnetic drilling machine.
- Do not operate the magnetic drilling machine with a damaged or worn cutter. Do not operate the machine with a damaged or worn pilot pin. Do not operate the machine with any damaged accessory. Operating the machine with any damaged part or accessory can cause accidents and severe injuries. If there is any damage to the magnetic drilling machine do not operate the machine. Take it to an authorized Nitto Dealer for repair.
- Always have the magnetic drilling machine repaired at an authorized Nitto dealer. Always take the magnetic drilling machine to an authorized Nitto dealer for service, repair and replacement parts. If you cannot locate an authorized Nitto dealer near you, please contact your sales representative.
- Always use Nitto genuine parts. The use of improper or non-Nitto parts can cause accidents and severe injuries. Never use unauthorized parts. To obtain genuine Nitto parts, contact your sales agent.
- Do not remove any nameplate from your magnetic drilling machine. Do not remove any labels from your magnetic drilling machine. If any label or nameplate is damaged contact your sales agent for a replacement.

## **POWER TOOL SAFETY**

### **WARNING**

- Always make sure that the machine is properly grounded. If the machine is not properly grounded, someone can get an electric shock.

- If you have any doubt about the grounding of the magnetic drilling machine, contact a licensed electrician.
- Never connect the grounding conductor to a gas pipe. This will result in an explosion and severe injuries or death.
- Always check the grounding conductor. If you have any doubts about the grounding conductor contact a licensed electrician.
- Wiring connections to a grounding rod require the expertise of a licensed electrician. Do not attempt the wire connections yourself. Always contact a licensed electrician.
- Do not abuse the power cord. A damaged power cord can cause an electrocution. A damaged power cord can cause fires. Always inspect the cord. If the cord is damaged, do not use the magnetic drilling machine.
- Do not carry the machine by the cord. Do not pull the cord to disconnect it from a socket.
- The cord can become damaged from heat, contact with sharp objects or from being twisted. Always inspect the cord. Do not use the machine if the cord is damaged.
- Always use a ground fault circuit interrupter. The use of a ground fault circuit interrupter may be required by government regulations. The failure to use a ground fault circuit interrupter may result in electric shock.
- Avoid starting the magnetic drilling machine abruptly or unintentionally.
- Always make sure that the switch is turned off before connecting the power source.
- Always disconnect the power source and turn off the switch before setting up for work operations. Always disconnect the power and turn off the switch when inspecting work. Always disconnect the power and turn off the switch before attempting any maintenance. Failure to disconnect the power and turn off the switch during set up, inspection or maintenance can cause accidents and severe injuries.

## ABOUT YOUR NITTO PORTABLE MAGNETIC DRILLING MACHINE

### DANGER

**Do not use your portable drilling machine on the ceiling.**

- Use of the portable drilling machine on the ceiling is dangerous. The machine could fall. The falling machine could cause severe injuries or death. (Fig.1)

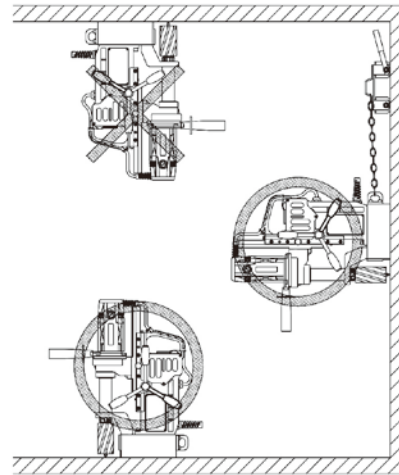


Fig. 1

### WARNING

**Do not use the Magnet for more than five hours.**

- More than five hours of uninterrupted operation may cause a fire. Five hours of uninterrupted operation generates extreme heat in the Magnet. This heat can cause a fire. Do not touch the Magnet. When the Magnet is hot, touching it will cause a severe burn injury. Never use the Magnet for more than five continuous hours. When you are not using the Magnet, turn the switch to the OFF position and pull the Plug out of the power source.

**Do not use the Drill Motor for over 30 minutes.**

- Uninterrupted operation of the Drill Motor for over 30 minutes generates heat. This heat can cause a fire. Never use the Drill Motor for over 30 minutes. When you are not using the Drill Motor, turn the switch to the OFF position and pull the Plug from the power source.

**Use only on magnetic materials.**

- Your portable drilling machine cannot be used on non-magnetic materials, such as aluminum, stainless steel, copper or alloys. The Magnet will not work on non-magnetic materials. Attempting to use the Magnet on non-magnetic materials could cause an accident.

**Use caution during wall operation.**

- When using your portable magnetic drilling machine on a magnetic wall, always use caution.
- Never stand under the machine.
  - \* Never allow anyone to stand under the machine.
  - \* Never put any part of your body under the machine.
  - \* If the machine falls, it could result in severe injury or death.
- Always remove Cutting Oil from the Tank before using the machine on a wall. You must manually apply Cutting Oil to the cutting tool.



**Always use a work piece that is at least 9 mm thick.**

- The work piece must be at least 9 mm thick. If a work piece is too thin, the magnetic power of your machine will decrease. This will cause the machine to move during operation. This could result in an accident. (Fig.2)

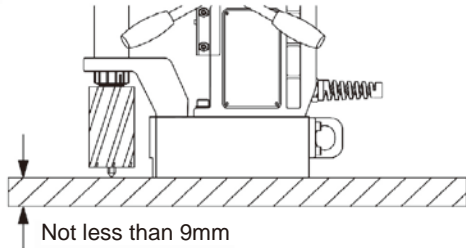


Fig. 2

**Use an iron back-up plate.**

- If the work piece is less than 9mm thick, you must use an iron back-up plate that is more than 10 mm in thickness. The surface area of the iron back-up plate must be greater than the surface area of the magnet. An appropriate back-up plate is necessary to boost the holding power of the Magnet.(Fig.3) Use of an inappropriate back-up plate can result in an accident, If the back-up plate is not thick enough or big enough, the machine will come loose during operation. This can result in an accident and severe injuries.

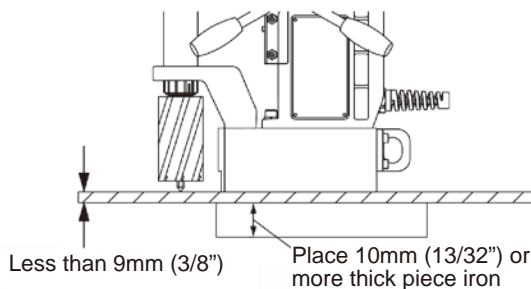


Fig. 3

**Always keep surfaces clean.**

- Always keep the Magnet surface clean. Always keep the work piece surface clean. If there are any foreign objects between the Magnet and the work piece surfaces, this will reduce magnetic power. This could cause the machine to move during operation. This can result in an accident. Keep all surfaces clean of rust, chips or other foreign material.

**Do not place the machine over a hole.**

- Do not attempt to position the Magnet over a hole. Attempting to straddle a hole will reduce the power of the Magnet. This will cause the work piece to come loose during operation and can cause an accident.

**Always use a chain to secure the machine.**

- If the machine falls, it can cause severe injuries. There is always a possibility that magnetic power can be lost or reduced because of a power failure. Magnetic power can be lost on rough surfaces. You must take precautions to prevent the machine from falling.
- This machine comes with a chain. The chain is to be used to fasten the machine to the work piece. If you do not use the chain, it is possible that the machine may fall. (Fig.4)
- If use of the chain is not possible because of the size of the work piece, you must use another method of securing the machine. Use a Supporting Magnet Assy to prevent the machine from falling.
- The use of a Supporting Magnet Assy is shown below. (Fig.5)




Fig. 4




Fig. 5

**Always set the Magnet in the proper position.**

- Always set the Magnet parallel to the longitudinal direction of the material. Failure to set the Magnet in the proper position may result in reduced magnetic power. This can cause the machine to move in operation. This can cause an accident resulting in severe injuries.
- When using on H-section steel, as shown in the figure below, set the Magnet in a direction parallel to the longitudinal direction of the material. This will ensure that the Magnet is in the best position for magnetic attraction.(Fig.6)
- Poor magnetic power may result in damage to the cutter or damage to the work piece.

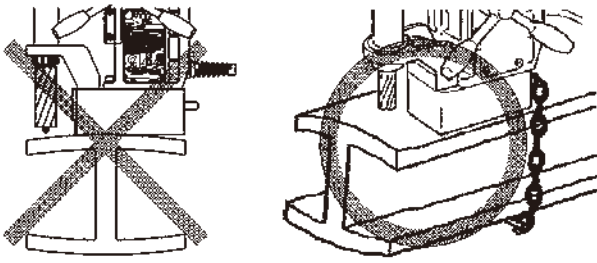


Fig. 6

**Be careful about chips.**

- Keep your hands away from the cutting area at all times. During drilling, there will be chips. The chips are sharp. The chips are rotating with the cutter. Any contact with the chips can cause severe injuries.

**Do not touch the slug.**

- Do not touch the slug. The slug is very hot. It will cause severe burns. Make sure that no one touches the slug. Make sure that there is no one below the work area during operation. Hot slugs will fall. Hot slugs can cause severe burns, other severe injuries, or even death. Always wear protective equipment, including protective headgear, eye protection, hearing protection, and gloves. Do not allow any person without protective equipment to come near the machine.

**Do not use your hands to remove chips.**

- Chips have sharp edges. Use a screwdriver to remove chips. If you use your hands to remove chips, you can be injured, even if you are wearing gloves. Do not use your hands to remove chips under any circumstances.

**The cutting edge is sharp.**

- Always wear gloves when changing the cutter. The cutting edge is sharp. If you do not wear gloves, you will be cut. Attempting to change the cutter can result in severe injuries.

**Do not use Cutting Oil for other purposes.**

- Cutting Oil should be used only for drilling. Please refer to Section 5-5 of this manual for further warnings and instructions about Cutting Oil.

**⚠ CAUTION**

**Always use a compatible Pilot Pin.**

- The Pilot Pin must be compatible with the cutter. An improper Pilot Pin may result in an accident. See Section 5-3 to identify compatible Pilot Pins and cutters. The proper Pilot Pin to be used will vary, depending on the type of cutter, the diameter of the cutter, and the length of the cutter.

**Do not use power that is generated by an engine-driven welder.**

- The use of an engine-driven welder as a power source may cause your magnetic driven machine to malfunction, Power from an engine-driven welder can damage the electronic circuits in your portable drilling machine.

**Use a Proper extension cord.**

- Do not use an extension cord that is too thin. Do not use an extension cord that is too long. Do not use an extension cord that is wound on a drum. Do not share an extension cord with other motor-driven tools. These uses can cause voltage to drop and can reduce the holding power of the magnetic base, causing the machine to move during operation. This can decrease performance and may cause damage to the machine. (Fig.7)

| Extension Cord |  |
|----------------|--|
| Max length     | Size (nominal cross-section area of the conductor) |
| 10 m           | Min 1.25 mm <sup>2</sup> or more                   |
| 20 m           | Min 2.00 mm <sup>2</sup> or more                   |
| 30 m           | Min 3.50 mm <sup>2</sup> or more                   |

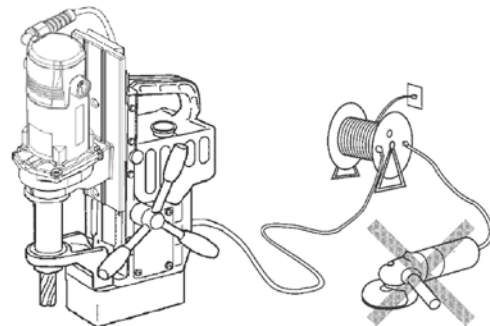


Fig. 7

**Don't use this machine on the steel material being electrically welded.**

- When the electric welder is not properly grounded, electricity will run through the Atra Ace machine via its Magnet, causing possible failure or malfunctioning, which in turn may cause accident.

**Don't force to feed cutter when drilling manually.**

- Because the Hi-Broach and Jet-Broach have rather thin cutting edges with less cutting pressure resistance as compared to twist drill, do not force to feed the cutter when drilling manually. If you feed it with too much force, the cutter may break or end up with shorter life than otherwise.

## 1 APPLICATION

This is a portable drilling machine with a Magnet, geared to drilling mild steel (mild steel or equivalent) using One-Touch type Jet-Broach or Hi-Broach. The machine will be mounted on the workpiece to be drilled with the Magnet securely fastening the machine to the workpiece while drilling takes place.

## 2 RECEIVING INSPECTION

Upon unpacking, check to see that the shipment is complete without damage or oil leakage in transport. Should you find any damage or short-shipment, please contact sales agent through which you have purchased your machine or an authorized dealer near you for corrective actions.

| Package Contents        | Q'ty | Check |
|-------------------------|------|-------|
| ATRA ACE                | 1set |       |
| Pilot Pin 08050         | 1    |       |
| Hex. Socket Screw Key 3 | 1    |       |
| Hex. Socket Screw Key 5 | 1    |       |
| Spanner 8X10            | 1    |       |
| Cutting Oil 0.5ℓ Can    | 1    |       |
| Sub Handle              | 1    |       |
| Chain                   | 1    |       |
| Guard                   | 1    |       |
| Instruction Manual      | 1    |       |





## 4 FUNCTIONS OF ELECTRONIC CONTROL

### 4-1. Overload Detecting Function

#### WARNING

- Don't touch the cutter even if the Drill Motor stops temporarily.

When the Magnet Switch is turned to ON, a lamp on the side of main body will light up in green.

As the drilling operation load increases, the lamp will change in color from green to orange to red. In addition, if the feeding force is further increased, the lamp will rapidly blink in red and the rotation of the Drill Motor will slow down and finally stop temporarily. If the load is released while the lamp is blinking in red the Drill Motor will resume its rotation. If the load is not released, the Drill Motor will come to a complete stop and the lamp will blink in green. To resume the rotation of the Drill Motor release the load and turn on the switch of the Drill Motor.

### 4-2. Lateral-Shifting Detection Function

This function stops the Drill Motor when lateral shifting of the Magnet base is detected.

As this function comes into action, the lamp will blink in orange.

To continue operation, turn OFF the Magnet Switch and, after confirming the drilling position, turn ON the Magnet Switch again, and turn ON the Drill Motor switch to start rotation of the Drill Motor.

### 4-3. Re-Start Prevention Function

The re-start prevention function comes into play when power failure is restored that has occurred during operation.

Thanks to this feature, when a plug that has been disconnected during operation is re-plugged into the receptacle or when power failure that has occurred during operation is restored, the Drill Motor will NOT restart automatically preventing possible accident -- although Magnet Switch lamp will come on and magnetic power restored.

To resume operation, turn ON the Motor Switch on the rear of the machine to start the Drill Motor.

### 4-4. Magnet Interlocking Function

If the magnet is disconnected, the lamp will blink in red and the Drill Motor will not revolve.

When the Magnet fails the Drill Motor will not start revolving. To repair defective Magnet, please contact sales agent through which you have purchased your machine or an authorized dealer near you.

## 5 MACHINE SETUP

### WARNING

- When setting up machine, turn off the Magnet Switch and disconnect the power supply plug from power source.

### 5-1. Mounting Parts

Mount the Side Handle on the Drill Motor.

### 5-2. Using Cutter

#### CAUTION

- Use One-Touch type cutters only.
- For better workability and safety, do not use worn or damaged cutters.

### 5-3. Combination of Cutter and Pilot Pin

#### CAUTION

- Do not use any other combinations than those shown in the compatibility table.

Use a Pilot Pin appropriate for the cutter. (Fig.9)

A Pilot Pin to be used varies depending on the cutter type, diameter, length (depth). A wrong combination of cutter and Pilot Pin would not allow slug to be ejected at the end of drilling and/or prevent Cutting Oil from reaching the cutting point, resulting in cutting tool damage.




















| PILOT PIN  | HI-BROACH Cutters   |
|--|---|
| 06025 PN:TK01167<br> | HBO 12 to 17 dia.<br>Depth 25 mm<br>   |
| 08025 PN:TJ12696<br> | HBO 17.5 to 50 dia.<br>Depth 25 mm<br> |
| 06050 PN:TK01166<br> | HBO 12 to 18 dia.<br>Depth 50 mm<br>   |
| 0850 PN:TK00802<br>  | HBO 19 to 50 dia.<br>Depth 50 mm<br>   |
| 08050 PN:TJ16019<br> |   |
| PILOT PIN  | JETBROACH Cutters   |
| 06025 PN:TK01167<br> | JBO 12 to 17 dia.<br>Depth 25 mm<br>   |
| 08035 PN:TJ15859<br> | JBO 17.5 to 40 dia.<br>Depth 35 mm<br> |
| 06050 PN:TK01166<br> | JBO 12 to 17 dia.<br>Depth 50 mm<br>   |
| 08050 PN:TJ16019<br> | JBO 17.5 to 55 dia.<br>Depth 50 mm<br> |
| 08075 PN:TJ17436<br> | JBO 17.5 to 55 dia.<br>Depth 75 mm<br> |

Fig. 9

#### 5-4. Mounting/Removing Cutter

### **WARNING**

- Wear safety gloves when replacing cutter.

### **CAUTION**

- Do not use any other combinations of Pilot Pin and cutter than those shown in the compatibility table.

- (1) Bring the Drill Motor up by turning the Rod Handle clockwise. (Fig. 10)

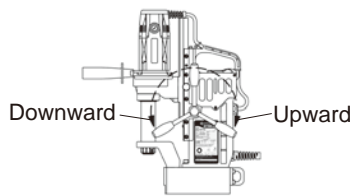


Fig. 10

- (2) Insert a Pilot Pin, appropriate for the cutter size, into the cutter. (Fig.11)




Fig. 11

- (3) Align the depression in the cutter with the white line on the Sleeve, and then insert the cutter.

When you insert the cutter far enough the Sleeve will turn clockwise and lock with a clicking sound.

\* When you find it hard to insert the cutter, turn the Sleeve counterclockwise and do over. (Fig.12)




Fig. 12

- (4) To remove the cutter, turn the Sleeve counterclockwise. The cutter will come off. (Fig.13)




Fig. 13

#### 5-5. Preparation of Cutting Oil

##### Cutting Oil Safety Precautions

### **WARNING**

#### (1) Use

- Use Cutting Oil for cutting purpose only. Don't use it for household purposes

#### (2) Handling Precautions

- The Cutting Oil contains amine. Do not mix it up with rust inhibitor, etc. containing nitrite.
- Wear safety glasses for eye protection when handling Cutting Oil: eye injury may results if it gets into your eyes.
- Wear protective gloves for hand protection when handling Cutting Oil: skin injury may result if it comes into contact with your skin.
- Wear respirator when exposure to respiratory hazards with oil mist or vapor is anticipated. Inhalation of oil mist or vapor may make you feel sick.
- When diluting Cutting Oil, follow the instructions per the Operation Manual.
- Keep Cutting Oil out of reach of children.
- Don't drink Cutting Oil.

#### (3) First Aid

- If Cutting Oil gets into your eyes, immediately open your eyelids with your fingers and wash your eyes with plenty of water for at least 15 minutes. If your eyes feel irritated, consult with a medical doctor and follow his/her instructions.
- If Cutting Oil comes into contact with your skin, immediately wash it away with plenty of water and soap. Take off contaminated clothes. Clean the clothes if you need to wear it again. If your skin feels irritated, consult with a medical doctor for medical instructions.
- If someone inhales oil mist or vapor, immediately take him/her to an area where fresh air is abundant and wrap up his/her body with a blanket, etc. to keep body temperature. Have him/her take a rest and consult with a medical doctor for medical instructions.
- If someone drinks Cutting Oil, immediately make him/her drink plenty of water and vomit it. Consult with a medical doctor for medical instructions. When unconscious, do not pour water into his/her mouth nor induce him/her to vomit.

#### (4) Instructions in Case of Fire

- If fire breaks out in the vicinity, wear PPE (personal protective equipment) and use foam, powder or CO<sub>2</sub> fire extinguisher to put the fire out from the windward.

### (5) Storage

- When storing Cutting Oil after use, put it into a container and put a lid on for tight sealing so that dust or moisture, which is a catalyst for contamination, may not get in.
- Avoid direct sunlight, rainwater or the like and store Cutting Oil in a dim cool area.

### (6) Disposal

- For disposal of concentrate solution and used fluid, request a waste-disposal company to dispose them as industrial waste in accordance with the local laws and regulations.
- Treat flushing water through pH adjustment, condensation/sedimentation, activated sludge process, activated carbon adsorption, etc., and discharge it in accordance with the regulations of your local municipal bylaw.
- Residual dross will remain in an emptied container: be careful when handling an empty container.

### (7) Others

- When Cutting Oil is poured into another container for use, post chemical and label information at the site where it is kept. At the same time, keep the Operation Manual handy so that it can be referred to whenever necessary.
- For further details, contact us for product safety data sheet.
- All the information and descriptions that have been provided are based on the currently available documents and information, which may be revised upon our new recognition and/or discovery.
- The precautions provided apply to regular handling. If special handling method is used, take safety measures that are suitable for your applications and usage.
- The information contained herein is for your reference purpose only, to which we make no warranty of any kind and for which we shall not be held responsible.

### Preparation of Cutting Oil

- (1-1) Use our genuine-product Cutting Oil (blue). If other Cutting Oil is used, the cutting performance and service life of cutter would be decreased.
- (1-2) Use tap water to dilute Cutting Oil by 8- to 10-fold. Do not use well water.
- (1-3) The oil tank is of the stationary type. Remove the rubber cap and pour Cutting Oil from the Oil Tank inlet. Do not spill Cutting Oil on the machine.

### 5-6. Position Change of Rod Handles

- Rod Handles can be positioned either on the right or left side of the machine, by changing the Pinion Shaft insert direction as follows;
- (1) Unscrew Hex. Soc. Button Head Screw 8x15 using Hex. Socket Screw Key 5 included in the accessories.
  - (2) Pull out the Pinion Shaft Assy with Rod Handles as shown in the sketches in Fig. 14.

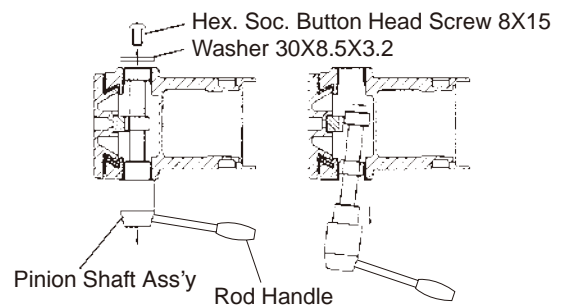


Fig. 14

Always keep the pinion teeth clean and covered with grease.

- (3) Insert the Pinion Shaft Assy from the other side of the shaft hole, and put the Screw back.

### 5-7. Connecting the Power Supply Plug to Power Source

- Before connecting the power supply plug to power source, turn off the switch. Always use the correct voltage for power source.

## 6 MACHINE OPERATION

### WARNING

- Always Wear Safety Glasses.
- Always Wear Hearing Protection.
- Wear respiratory protective equipment.

### CAUTION

- Do not use hard material such as a screwdriver, to operate the Motor Switch. This may damage the panel and switch, which would lead to machine failure.

#### 6-1. Start and Stop

- The Drill Motor will not rotate unless a Magnet is turned on in operating the Motor Switch.

##### (1) Start

- Magnet ON (Fig.15)

Turning the Magnet Switch ON illuminates the switch lamp and energizes magnetic power.

- Drill Motor ON (Fig.16)

Turning the Motor Switch ON starts the Drill Motor.



Fig. 15




Fig. 16

##### (2) Stop

- Drill Motor OFF (Fig.17)

Turning the Motor Switch OFF stops the Drill Motor.

- Magnet OFF (Fig.18)

Turning the Magnet Switch OFF turns off the switch lamp and Magnet power.




Fig. 17



Fig. 18

#### 6-2. Drilling Procedure

##### (1) Punch Marking

Put a rather large punch mark in the workpiece by driving a punch down with a hammer. The punch mark will be used as a guide for drilling operation that follows, so it must be made in accurate position. (Fig.19)

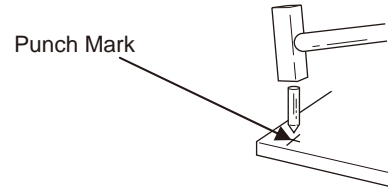


Fig. 19

##### (2) Keep the Magnet and Workpiece Contacting Surfaces Clean.

### WARNING

- Always keep surfaces clean.

Always keep the Magnet surface clean. Always keep the work piece surface clean. If there are any foreign objects between the Magnet and the work piece surfaces, this will reduce magnetic power. This could cause the machine to move during operation. This can result in an accident. Keep all surfaces clean of rust, chips or other foreign material.

##### (3) Aligning with Punch Mark.

Turn the Rod Handle counterclockwise to slightly lower the cutter and align the tip of Pilot Pin to the punch mark. (Fig.20)

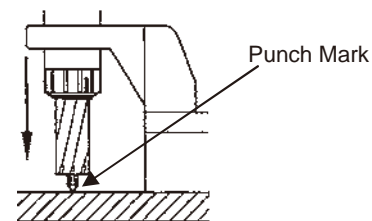


Fig. 20



#### (4) Magnet ON

### ⚠ WARNING

- **Check to see that Magnetic power is at work.**  
Turn on the Magnet Switch. The switch lamp will glow and magnetic power will come on.

#### (5) Controlling Cutting Oil Flow.

Open the P-Valve and turn the Rod Handle. Pilot Pin will move up allowing Cutting Oil to flow.

#### (6) Mounting the Guard

Mounting the Guard as shown. (Fig.21)

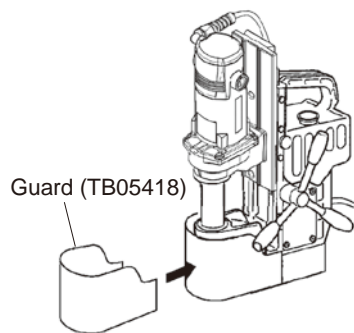


Fig. 21

#### (7) Oil Flow Control

After installed cutter and Pilot Pin, press the Pilot Pin on to the workpiece, and oil flow starts when P-Valve is opened. Such flow is recommended that the cutter chips be kept constantly wet during drilling and free from discoloration due to overheat burn. Drilling without enough oil causes longer cycle time and shorter cutter life.

#### (8) Drill Motor ON

### ⚠ WARNING

- **Don't touch revolving parts.**  
Press the Drill Motor ON Switch to start the Drill Motor

#### (9) Drilling

### ⚠ WARNING

- **Don't press the Rod Handle strongly or the Magnet may lift, causing the main body to swing.**

### ⚠ CAUTION

- **Only perform drilling operation when the Overload Detector Lamp is lit in green and orange. If drilling operation continues while the lamp is lit in red, the Drill Motor may burn out.**  
**For the first 2 to 3mm (5/64" - 7/64") of the drilling, operate the drill gradually and only apply a light force to the Rod Handle. (Fig.22)**

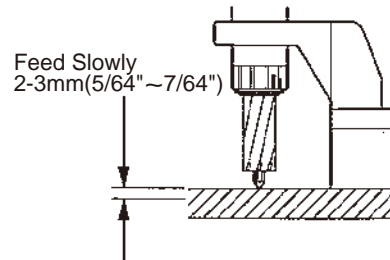


Fig. 22

When putting a hole through workpiece with a tapered bottom surface or bottom surface with a radius, such as angle, channel, H-section steel, etc., use low feed rate at the start as well as toward the end of drilling operation where the likelihood of tool chipping is high.(Fig.23)




Fig. 23

#### (10) Finishing Drilling Operation

### ⚠ WARNING

- **Be careful about chips.**
- **Do not touch the slug.**
- **Do not use your hands to remove chips.**

After completion of drilling operation, lift the Drill Motor and turn OFF the Motor Switch (Fig. 24).

When the Drill Motor stops, immediately turn OFF the Magnet Switch (Fig. 25). If the Magnet Switch is kept ON for a long time, the continuous current flowing through the Magnet could shorten the service life of the Magnet.




Fig. 24



Fig. 25

### (11) Removing Slug

Don't proceed to the next operation without removing the slug from the operation just finished. At the end of drilling operation slug will pop out automatically ejected by the spring-operated Pilot Pin. Should a slug left in the hold sticking, remove it from the hole by tapping the collar of the slug with a needle stick or something. (Fig.26)

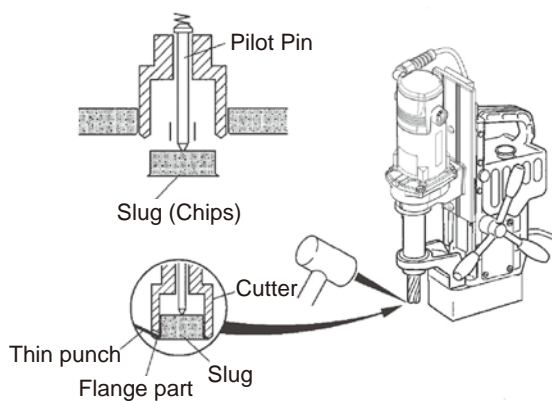


Fig. 26

### 6-3. Drilling Oblong Hole

## ⚠ CAUTION

**Always drill oblong hole slowly.**

Drill oblong hole in the order of ①, ②, ③. For the steps ② and ③, take care so that the cutter may not be fed into the workpiece with too much force. Spacing between each step of drilling operations should be so arranged that the Pilot Pin will always hit the material yet to be machined. (Fig.27)

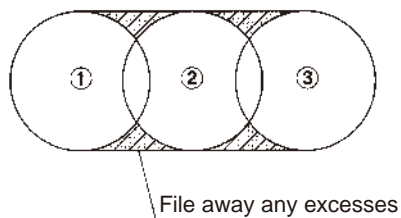


Fig. 27

### 6-4. Drilling Stacked Plates

## ⚠ CAUTION

- Remove slug as each plated is finished: otherwise, being blocked by the slug left unremoved, the cutter cannot cut into the next layer of plate, which results in the Magnet base being pushed up possibly causing accident.
- For stacked plates drilling, always feed and drill slowly and carefully.
- Before drilling stacked plates, securely clamp the plates together in place.
- When drilling stacked plates, retract the cutter as each layer of plate is finished in order to remove slug from the drilling area, then put another hole in the next layer of plate.

## 7 TROUBLESHOOTING

### WARNING

- Never attempt to repair machine yourself: injury or damage to equipment may result.
- Please feel free to consult the sales agent through which you have purchase your machine or an authorized dealer, when the following symptoms appear or when you have any questions about our products.

The machine has electronic control. Be sure to turn off all the switches, pull up the electric drill, and then check the machine, when the operator come across to the following situations such as.

#### Troubleshooting

| Problem  | Causes  | Solutions   |
|--|---|---|
| Switch lamp doesn't come on when Magnet Switch is turned on.   | Power supply plug is not connected to socket.                           | Connect power supply plug to socket.  |
| Drill Motor doesn't start when Motor Switch is turned on.  | Red lamp blinks: Magnet is disconnected.                                | Request for repair.   |
|  | Orange lamp blinks: the workpiece is displaced after magnet attraction. | Fix the workpiece.  |
| Drill Motor stops during drilling. (Magnet is not working with Magnet lamp not illuminating.)                                    | Power failure has occurred or power supply plug is disconnected.        | After power failure is restored or power supply plug is re-connected, turn on Motor Switch again. |
| The rotation of Drill Motor slows down and stops during drilling. (The lamp rapidly blinks in red.)                              | Feeding force is excessive.   | Reduce the feeding force.   |
| Drill Motor stops during drilling operation. (Lamp blinks in green.)   | Feeding force is excessive.   | Reduce the feeding force.   |
| Lateral shifting of Magnet is detected by lateral position sensor, bringing machine to a complete stop. (Lamp blinks in orange.) | Workpiece too thin.   | Use back-up plate: thickness 10 mm (13/32") or more.  |
|  | Chips under Magnet base.  | Clean it up.  |
|  | Worn cutting edge.  | Regrind or replace with new one.  |
|  | Effective magnetic force too weak.                                      | Ask for repair.   |

## 8 MAINTENANCE/SERVICE

### WARNING

- Always disconnect the power and turn off the switch before attempting any maintenance. Failure to disconnect the power and turn off the switch during set up, inspection or maintenance can cause accidents and severe injuries.
- Check to see periodically that mounting screws are tight. If you find them loose, retighten.

#### 8-1. Tighten Set Screw When Machine is Not Used

For the purpose of safety, when you don't use the machine temporarily or on a long-term basis, raise the Drill Motor and set it in position with the Set Screw so that it will not come down on its own weight. If you leave the machine alone with the Drill Motor in a lowered position, the Pilot Pin and/or cutter may be damaged when the machine is relocated. (Fig.28)

#### 8-2. Grease the Sliding Surfaces from Time to Time

Grease the machine body and Slide Board from time to time. (Fig.28)

#### 8-3. Slide Board Clearance Adjustment

Excessive clearance between the machine body and Slide Board would deteriorate not only drilling performance but also cutting tool life to a substantial degree. If you find excessive clearance, make adjustment by tightening 5 slide board adjusting screws on the side of the machine using the same torque all round so that the Drill Motor will not come down on its own weight. (Fig.28)

#### 8-4. Bracket Inspection and Oiling

Among other things, drilling accuracy hinges on the Bracket that supports the Arbor Body. See that the (three Hexagon Socket) Bracket mounting bolts are tight, from time to time. (Fig.28)

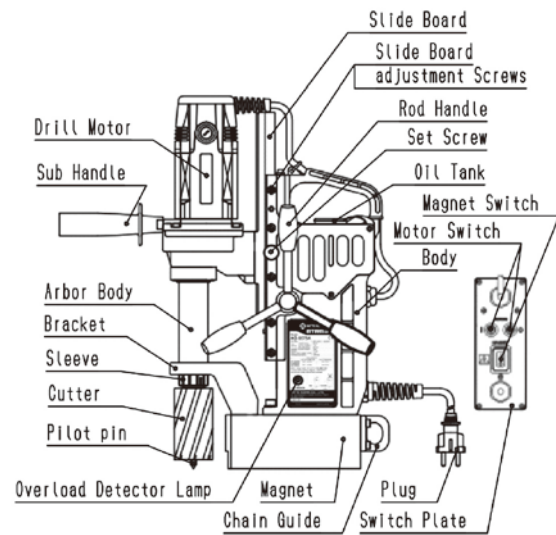


Fig. 28

#### 8-5. Keep the Tip of Pilot Pin Sharp

When the tip of Pilot Pin gets dull, it sometimes fails to seat into punched hole, causing drilling accuracy to deteriorate. See that the tip is sharp from time to time.

If you find it too dull, regrind or replace as required. When regrinding do so carefully, for grinding with too much force may cause the tip to get dull or soften the material to such a degree that it is no longer usable. (Fig.29)

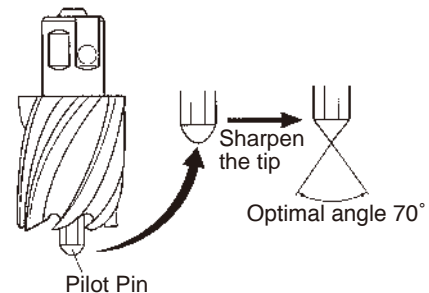


Fig. 29

#### 8-6. Recovery Measures When Pilot Pin Gets Jammed

When you change cutting tool you also change Pilot Pin, which acts as a guide for the cutting tool. However there are times when the pin does not come off easy with cutting chips in the clearance between the cutting tool and pin, causing jamming. In such case, tap the tip of Pilot Pin with a wooden hammer, etc., and pull it off. (Fig.30)

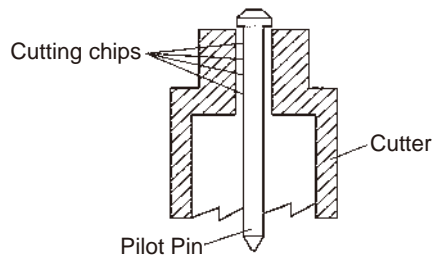


Fig. 30

### 8-7. Cutter Regrinding

When you need to regrind cutter, please contact sales agent through which you have purchased your machine or an authorized dealer near you.

### 8-8. Carbon Brushes Inspection and Replacement

Check Carbon Brushes for wear periodically.

When the length of Carbon Brushes gets as short as 8 mm, replace it with a new one, for, if you don't, chances are that you'll have a rectification problem which may cause machine failure. (Fig.31)

- (1) Loosen the tap screws to remove the cap.
- (2) Take out the Carbon Brush and replace it with a new one.
- (3) Put the cover on and securely tighten the tap screws. When tightening the tap screws, see that the tap screws are screwed in along the existing screw threads – without cutting new threads.
- (4) After replacement, run the machine with no load for approx. 10 minutes.




Fig. 31

## 9 OPTIONAL PARTS

### 9-1. Nitto-Brand Cutting Oil



Use Nitto-brand Cutting Oil for Atra Ace.

| Part No. | Part Name                   |
|----------|-----------------------------|
| TB01507  | Cutting Oil 2l (Light Blue) |

### 9-2. Pilot Pin (metric size)

| Part No.   | Part Name       | Depth(mm) | Applicable Cutter(mm)                              |
|------------|-----------------|-----------|--|
| TK01167    | Pilot Pin 06025 | 25        | Hi-Broach 12 to 17 dia.<br>Jetbroach 12 to 17 dia. |
| TJ12696    | Pilot Pin 08025 |           | Hi-Broach 17.5 to 35 dia.                          |
| TJ15859    | Pilot Pin 08035 | 35        | Jetbroach 17.5 to 40 dia.                          |
| TK01166    | Pilot Pin 06050 | 50        | Hi-Broach 12 to 18 dia.<br>Jetbroach 12 to 17 dia. |
| TJ16019    | Pilot Pin 08050 |           | Hi-Broach 19 to 50 dia.                            |
| ※(TK00802) | Pilot Pin 0850  |           | Jetbroach 17.5 to 55 dia.                          |
| TJ17436    | Pilot Pin 08075 | 75        | Jetbroach 17.5 to 55 dia.                          |

※( ): Special Order

### 9-3. Supporting Magnet Ass'y

| Part No. | Part Name               |
|----------|-------------------------|
| TB04374  | Supporting Magnet Ass'y |

### 9-4. Sleeve 6.5 Ass'y for Twist Drills (Fig.32)

| Part No. | Part Name        |
|----------|------------------|
| TB02536  | Sleeve 6.5 Ass'y |

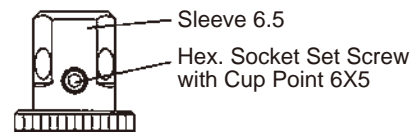


Fig. 32



## 9-5. Chip Breaker

### Chip Breaker Ass'y

| Part No.  | Part Name                       |
|-----------|---------------------------------|
| TB07474   | Chip Breaker Ass'y              |
| (TQ10787) | Blade                           |
| (TQ10695) | Blade Base                      |
| (TP14178) | Hex. Socket Head Cap Screw 6×10 |
| (TP01945) | Hex. Socket Head Cap Screw 5×12 |
| (TP01939) | Hex. Socket Screw Key 4         |
| (TP04004) | Hex. Socket Screw Key 5         |

The part number with ( ) are include in the Ass'y parts written above them.

### Mounting Chip Breaker

## ⚠ CAUTION

When setting Chip Breaker, see that the tip of blade may not come into contact with cutting tool. Chip Breaker breaks cutting chips formed in drilling into small pieces and facilitates chip discharging.

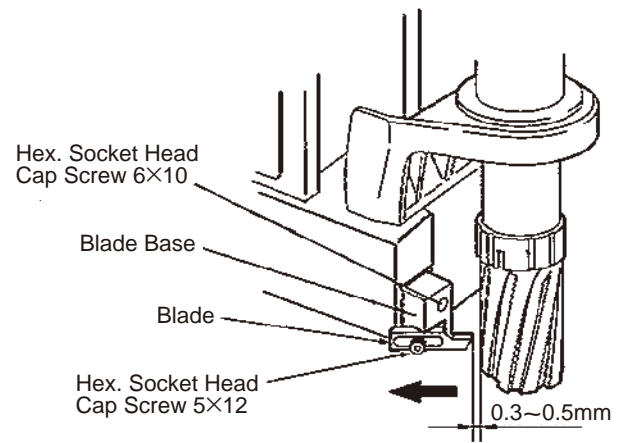


Fig. 33

(1) Mount Blade Base. (Fig.33)

- Use Hex. Socket head Cap Screws 6×10 to mount the Blade Base on the front face of Magnet. See that the bottom face of the Blade Base does not stick out from the bottom face of Magnet. When the bottom face of the Blade Base sticks out from the bottom face of the Magnet, it will lift the Magnet and diminish magnetic attraction.
- Use the Hex. Socket head Cap Screws 5 × 12 to mount a blade to the Blade Base in the direction as shown in the figure.

(2) Mount cutter.

Loosen the Hex. Socket head Cap Screws 5 × 12 and pull the Blade in the direction as shown by the arrow until it no longer moves. And then, mount a cutter.

(3) Set the blade.

Set the Blade in the way that the cutter and the blade will have a clearance of 0.3 mm - 0.5mm and fasten it securely to the Blade Base with Hex. Socket head Cap Screws 5 × 12.

## 9-6. Cutter

### Jetbroach One-touch Type 25L (metric sizes)

| Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) |
|----------|----------------------|----------|----------------------|----------|----------------------|
| TK01148  | 12 x25               | TK01150  | 14 x25               | TK01152  | 16 x25               |
| TK01149  | 13 x25               | TK01151  | 15 x25               | TK01153  | 17 x25               |

### Jetbroach One-Touch Type 35L(metric sizes)

| Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) |
|----------|----------------------|----------|----------------------|----------|----------------------|----------|----------------------|
| TK00301  | 17.5×35              | TK00310  | 22 x35               | TK00319  | 27 x35               | TK00328  | 35 x35               |
| TK00302  | 18 x35               | TK00311  | 22.5×35              | TK00320  | 28 x35               | TK00602  | 36 x35               |
| TK00303  | 18.5×35              | TK00312  | 23 x35               | TK00321  | 29 x35               | TK00603  | 37 x35               |
| TK00304  | 19 x35               | TK00313  | 23.5×35              | TK00322  | 30 x35               | TK00604  | 38 x35               |
| TK00305  | 19.5×35              | TK00314  | 24 x35               | TK00323  | 31 x35               | TK00605  | 39 x35               |
| TK00306  | 20 x35               | TK00315  | 24.5×35              | TK00324  | 32 x35               | TK00606  | 40 x35               |
| TK00307  | 20.5×35              | TK00316  | 25 x35               | TK00325  | 33 x35               |          |                      |
| TK00308  | 21 x35               | TK00317  | 26 x35               | TK00326  | 34 x35               |          |                      |
| TK00309  | 21.5×35              | TK00318  | 26.5×35              | TK00327  | 34.5×35              |          |                      |

### Jetbroach One-Touch Type 50L(metric sizes)

| Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) |
|----------|----------------------|----------|----------------------|----------|----------------------|----------|----------------------|
| TK01154  | 12 x50               | TK00387  | 21.5x50              | TK00400  | 30 x50               | TK00413  | 43 x50               |
| TK01155  | 13 x50               | TK00388  | 22 x50               | TK00401  | 31 x50               | TK00414  | 44 x50               |
| TK01156  | 14 x50               | TK00389  | 22.5x50              | TK00402  | 32 x50               | TK00415  | 45 x50               |
| TK01157  | 15 x50               | TK00390  | 23 x50               | TK00403  | 33 x50               | TK00416  | 46 x50               |
| TK01158  | 16 x50               | TK00391  | 23.5x50              | TK00404  | 34 x50               | TK00417  | 47 x50               |
| TK01159  | 17 x50               | TK00392  | 24 x50               | TK00405  | 35 x50               | TK00418  | 48 x50               |
| TK00380  | 17.5x50              | TK00393  | 24.5x50              | TK00406  | 36 x50               | TK00419  | 49 x50               |
| TK00381  | 18 x50               | TK00394  | 25 x50               | TK00407  | 37 x50               | TK00420  | 50 x50               |
| TK00382  | 19 x50               | TK00395  | 26 x50               | TK00408  | 38 x50               | TK00442  | 51 x50               |
| TK00383  | 19.5x50              | TK00396  | 26.5x50              | TK00409  | 39 x50               | TK00443  | 52 x50               |
| TK00384  | 20 x50               | TK00397  | 27 x50               | TK00410  | 40 x50               | TK00444  | 53 x50               |
| TK00385  | 20.5x50              | TK00398  | 28 x50               | TK00411  | 41 x50               | TK00445  | 54 x50               |
| TK00386  | 21 x50               | TK00399  | 29 x50               | TK00412  | 42 x50               | TK00446  | 55 x50               |

### Jetbroach One-Touch Type 75L(metric sizes)

| Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) |
|----------|----------------------|----------|----------------------|----------|----------------------|----------|----------------------|
| TK01036  | 17.5x75              | TK01012  | 27 x75               | TK01022  | 37 x75               | TK01032  | 47 x75               |
| TK01003  | 18 x75               | TK01013  | 28 x75               | TK01023  | 38 x75               | TK01033  | 48 x75               |
| TK01004  | 19 x75               | TK01014  | 29 x75               | TK01024  | 39 x75               | TK01034  | 49 x75               |
| TK01005  | 20 x75               | TK01015  | 30 x75               | TK01025  | 40 x75               | TK01035  | 50 x75               |
| TK01006  | 21 x75               | TK01016  | 31 x75               | TK01026  | 41 x75               | TK01112  | 51 x75               |
| TK01007  | 22 x75               | TK01017  | 32 x75               | TK01027  | 42 x75               | TK01113  | 52 x75               |
| TK01008  | 23 x75               | TK01018  | 33 x75               | TK01028  | 43 x75               | TK01114  | 53 x75               |
| TK01009  | 24 x75               | TK01019  | 34 x75               | TK01029  | 44 x75               | TK01115  | 54 x75               |
| TK01010  | 25 x75               | TK01020  | 35 x75               | TK01030  | 45 x75               | TK01116  | 55 x75               |
| TK01011  | 26 x75               | TK01021  | 36 x75               | TK01031  | 46 x75               |          |                      |

### Hi-Broach One-Touch Type 25L(metric sizes)

| Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) |
|----------|----------------------|----------|----------------------|----------|----------------------|----------|----------------------|
| TK00698  | 12 x25               | TK00341  | 21.5x25              | TK00354  | 30 x25               | TK00710  | 42 x25               |
| TK00699  | 13 x25               | TK00342  | 22 x25               | TK00355  | 31 x25               | TK00711  | 43 x25               |
| TK00700  | 14 x25               | TK00343  | 22.5x25              | TK00356  | 32 x25               | TK00712  | 44 x25               |
| TK00701  | 15 x25               | TK00344  | 23 x25               | TK00357  | 33 x25               | TK00713  | 45 x25               |
| TK00702  | 16 x25               | TK00345  | 23.5x25              | TK00359  | 34 x25               | TK00714  | 46 x25               |
| TK00703  | 17 x25               | TK00346  | 24 x25               | TK00361  | 35 x25               | TK00715  | 47 x25               |
| TK00335  | 17.5x25              | TK00347  | 24.5x25              | TK00704  | 36 x25               | TK00716  | 48 x25               |
| TK00336  | 18 x25               | TK00348  | 25 x25               | TK00705  | 37 x25               | TK00717  | 49 x25               |
| TK00337  | 19 x25               | TK00349  | 26 x25               | TK00706  | 38 x25               | TK00718  | 50 x25               |
| TK00338  | 19.5x25              | TK00351  | 27 x25               | TK00707  | 39 x25               |          |                      |
| TK00339  | 20 x25               | TK00352  | 28 x25               | TK00708  | 40 x25               |          |                      |
| TK00340  | 21 x25               | TK00353  | 29 x25               | TK00709  | 41 x25               |          |                      |

### Hi-Broach One-Touch Type 50L(metric sizes)

| Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) | Part No. | Diameter x Depth(mm) |
|----------|----------------------|----------|----------------------|----------|----------------------|----------|----------------------|
| TK00721  | 12 x50               | TK00731  | 22 x50               | TK00741  | 32 x50               | TK00751  | 42 x50               |
| TK00722  | 13 x50               | TK00732  | 23 x50               | TK00742  | 33 x50               | TK00752  | 43 x50               |
| TK00723  | 14 x50               | TK00733  | 24 x50               | TK00743  | 34 x50               | TK00753  | 44 x50               |
| TK00724  | 15 x50               | TK00734  | 25 x50               | TK00744  | 35 x50               | TK00754  | 45 x50               |
| TK00725  | 16 x50               | TK00735  | 26 x50               | TK00745  | 36 x50               | TK00755  | 46 x50               |
| TK00726  | 17 x50               | TK00736  | 27 x50               | TK00746  | 37 x50               | TK00756  | 47 x50               |
| TK00727  | 18 x50               | TK00737  | 28 x50               | TK00747  | 38 x50               | TK00757  | 48 x50               |
| TK00728  | 19 x50               | TK00738  | 29 x50               | TK00748  | 39 x50               | TK00758  | 49 x50               |
| TK00729  | 20 x50               | TK00739  | 30 x50               | TK00749  | 40 x50               | TK00759  | 50 x50               |
| TK00730  | 21 x50               | TK00740  | 31 x50               | TK00750  | 41 x50               |          |                      |

## 10 Ordering Parts

When ordering parts from sales agent, please be sure to give them part number, part name and quantity.



## Overseas Affiliates/Offices

---

NITTO KOHKI U.S.A., INC.  
46 Chancellor Drive, Roselle, Illinois 60172, U.S.A.  
For Cuplas  
Tel: +1-630-924-5959 Fax: +1-630-924-1174  
For Machine Tools  
Tel: +1-630-924-9393 Fax: +1-630-924-0303  
[www.nittokohki.com](http://www.nittokohki.com)

NITTO KOHKI EUROPE GMBH  
Gottlieb-Daimler-Str. 10, 71144 Steinenbronn, Germany  
Tel: +49-7157-989555-0 Fax: +49-7157-989555-40  
[www.nitto-kohki.eu/](http://www.nitto-kohki.eu/)

NITTO KOHKI EUROPE GMBH UK Branch  
Unit A5, Langham Park Industrial Estate, Maple Road,  
Castle Donington, Derbyshire DE74 2UT, United Kingdom  
Tel: +44-1332-653800 Fax: +44-1332-987273  
[www.nitto-kohki.eu/](http://www.nitto-kohki.eu/)

NITTO KOHKI AUSTRALIA PTY LTD  
77 Brandl Street, Eight Mile Plains, Queensland 4113, Australia  
Tel: +61-7-3340-4600 Fax: +61-73340-4640  
[www.nitto-australia.com.au](http://www.nitto-australia.com.au)

NITTO KOHKI(SHANGHAI)CO., LTD.  
Room1506, Suite C, Orient International Plaza,  
No.85 Loushanguan Road, Shanghai 200336, China  
Tel: +86-21-6415-3935 Fax: +86-21-6472-6957  
[www.nitto-kohki.cn](http://www.nitto-kohki.cn)

NITTO KOHKI(SHANGHAI)CO., LTD. Shenzhen Branch  
2005C Shenzhen ICC Tower, Fuhuasanlu 168,  
Futian District, Shenzhen, Guangdong 518048, China  
Tel: +86-755-8375-2185 Fax: +86-755-8375-2187  
[www.nitto-kohki.cn](http://www.nitto-kohki.cn)

NITTO KOHKI CO., LTD. Singapore Branch  
10 Ubi Crescent #01-62, Ubi Techpark Lobby D, Singapore 408564  
Tel: +65-6227-5360 Fax: +65-6227-0192  
[www.nitto-kohki.co.jp/e/nksb/index.html](http://www.nitto-kohki.co.jp/e/nksb/index.html)

NITTO KOHKI CO., LTD. Bangkok Representative Office  
M&A Business Center, Q-House Convent Bldg.,  
38 Convent Rd., Silom, Bangrak, Bangkok 10500, Thailand  
Tel: +66-2632-0307 Fax: +66-2632-0308  
[www.nittobkk.com](http://www.nittobkk.com)

NITTO KOHKI CO., LTD. India Liaison Office  
3rd Floor, Building No.9-A DLF Cyber City, Phase-  
Gurgaon, Haryana 122002, India  
Tel: +91-124-454-5031 Fax: +65-6227-0192

NITTO KOHKI CO., LTD. Mexico Representative Office  
OF1109 Torre Corporativo 1 Piso 11 Central Park Armando Birlain Shaffler  
#2001 Col Centro Sur, Queretaro, Qro, C.P. 76090, Mexico  
Tel: +52-442-290-1234

## ***INSTRUCTION MANUAL***

READ ALL INSTRUCTIONS BEFORE OPERATING THIS TOOL

**ATRA ACE Model AO-5575A**  
PROFESSIONAL TOOL